

PRIMECOAT SERIES 97 (part 2)

thermosetting powder coating for outdoor use
 polyester
 crocodile finish | crocodile finish with metallic effect
 3D velour | 3D velour with metallic effect
 fluorescent

Typical application

Protective and decorative coatings on metal items:

- Construction metal structures
- Agricultural machinery
- Transport elements
- Auto parts
- Garden and sports equipment.

Product details

- Packages: carton with antistatic PE bag liner, 20 kg, 5 kg or Big Bag for approx. 500kg, net
- Storage Stability: min 24 month (min 6 month for metallic) from manufacture (see printed date on product label)
- Storage temperature: <25°C
- Specific Gravity (ISO 8130-2): smooth 1.50–1.75 g/cm³ depending on pigmentation
- Moisture content (ISO 8130-7): <0.4%
- Particle size distribution (ISO 8130-13):
 - fine fraction up to 10 µm in size: <10%
 - base fraction up to 32 µm in size: 25–45%

Gloss level

- Fluorescent: 75–100*
- Crocodile: visual comparison
- 3D velour: visual comparison
- Crocodile with metallic effect: visual comparison
- 3D velour with metallic effect: visual comparison

* Gloss level acc. to DIN EN ISO 2813/60° angle (doesn't apply to metallic effect powder coatings).

Test results

Checked under laboratory conditions on a chromated 0.8 mm thick aluminium test panel.

Test method	Test	Crocodile	Crocodile metallic	3D velour	3D velour metallic	Fluorescent
ISO 2360	film thickness recommended	150-180 µm	150-180 µm	90-120 µm	90-120 µm	60-80 µm
ISO 2409	cross cut test/adhesion 1 mm cutting distance	GT 0	GT 0	GT 0	GT 0	GT 0
ISO 1519	mandrel bending test cracking of coating	-	-	-	-	≤5mm
ISO 3668	coating color, deviation	≤1mm	≤1mm	≤1mm	≤1mm	≤1mm
ASTM D 2794	ball impact test cracking of coating	Cracks	Cracks	Cracks	Cracks	Cracks

Processing

Corona, Tribostatic*

* Available upon inquire.

Color shades

Mainly RAL shades; also special domestic shades on request*.

* Gloss and color of coating parameters other than indicated in the table can be agreed with the customer.
Also available are fine and coarse texture-powders.

Pretreatments

Before the painting, the item should be adequately pretreated in accordance with surface type, final use and required performances. The following table can be used as starting point for the pretreatment choice. The surface shall be clean, dry and appear with a rough and dull profile.

Substrat	Indoor use	Outdoor use	Architecture
Aluminium	soil removal, chromate, chrome-free	chromate, chrome-free	chromate, chrome-free
Steel	soil removal, iron phosphate, zinc phosphate, sand-blasting	iron phosphate, zinc phosphate, sand-blasting	-
Zinc coated steel	acid attack, iron phosphate, chromate	acid attack, zinc phosphate, chromate	-


Oxides (rust) cleaning and de-greasing shall be carried out when the simplified process is used!

The simplified pre-treatment does not ensure necessary protective properties and decreases the service life of the coating.
Hot-dip galvanized steel requires additional mechanical processing (incision).

Cure parameters

Temperature and time combinations resulting in the optimal cross-linking of the coating.

Typical curing

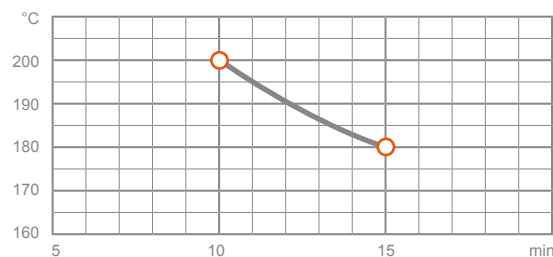

Temperature conditions of curing for each powder listed on the label.

Please observe cure parameters closely since mechanical properties will develop before full cross-linking!

To obtain optimal stoving conditions you are recommended to carry out practical trials each time, adapted to the carry out practical trials each time, adapted to the object in question and the stoving oven.

Our technical service department will be glad to advise you.

Note

The data is provided for information purposes and is not exhaustive. The customer using the product otherwise than indicated in the data sheet takes responsibility for the results obtained. As the manufacturer, we provide more precise product description, conditions of usage and all the application process accompanying factors. Due to the fact that direct control on our part cannot be effected in regards to the following of the aforementioned conditions, unless an additional written agreement is made, we offer no guarantees and hold no responsibility for the products usage and the results obtained.

Address:

Primatek Coatings OÜ
Kadastiku 29A
21004 Narva, Estonia

Contact:

Phone +372 655 1010
primatek-coatings.com

Bank details:

Swedbank AS:
EE87 2200 2210 5686 9100